



## RGBW LED

# Linear Wall Washer Light

Specialized for architectural and facade lighting, and particularly designed for museums, historical buildings, galleries, and exhibitions etc.

18W/36W



100 lm/W



IP66



IK08



CE


## FL56 Wall washer lighting fixture

FL56 is equipped with diecasting aluminium housing, outdoor powder coating finish and toughened glass diffuser.



Wall washing basically washes the exterior with light, creating an intriguing luminosity that will make your building stand out in the nighttime.


### Two sizes

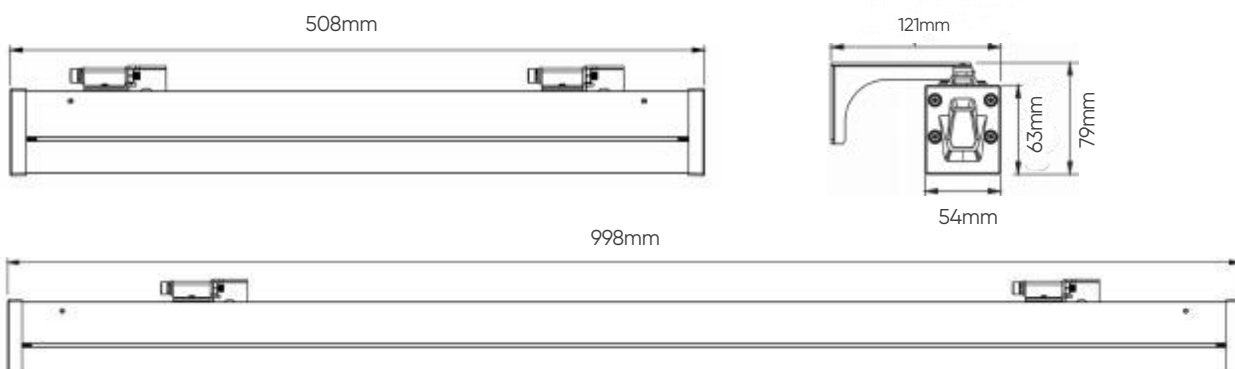




# What colors can we achieve?

Available for White/Warm White, RGB and RGBW Color  
Used a 4-in-one LEDs, mixing red green blue and white LEDs.

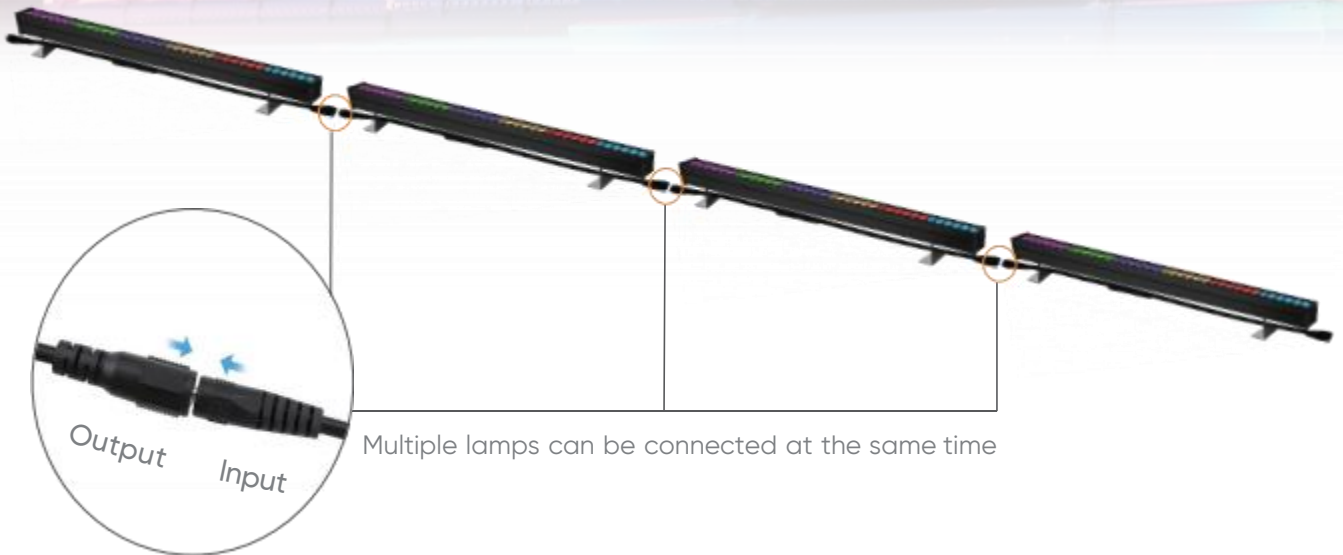

**Smart DMX** control with plug-and-play faster connector to get brilliant colors for projects




## Multiple optics, outstanding lighting effect

Adopting high transmittance PMMA lens and high hardness transparent glass.



## Single white

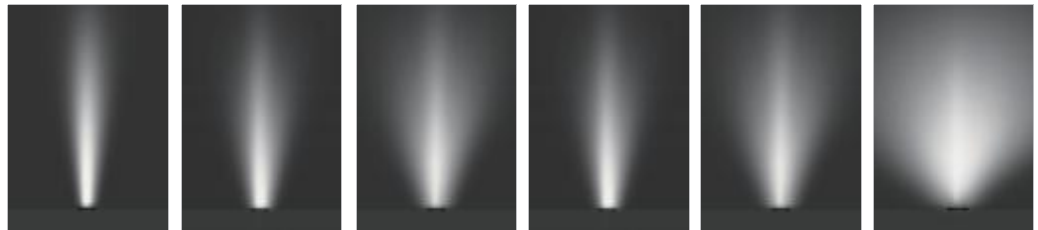

12°

30°


60°

15x30°

20x60°

75°

## RGB and RGBW

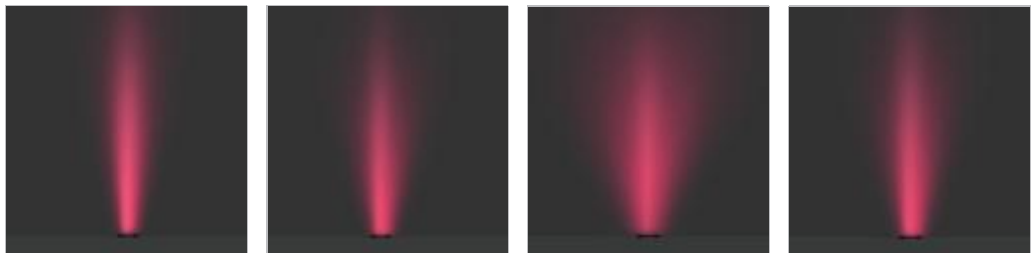


15°

25°

60°

15x30°

## Anti-glare accessory

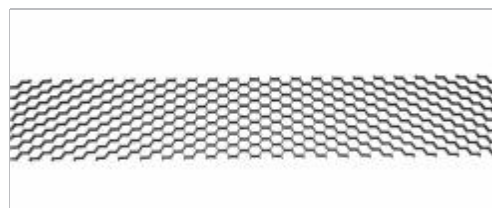

Honeycomb



Visor

## Bracket Mounting


---




### Easy Installation

180 ° adjustable for easy installation.

>>>

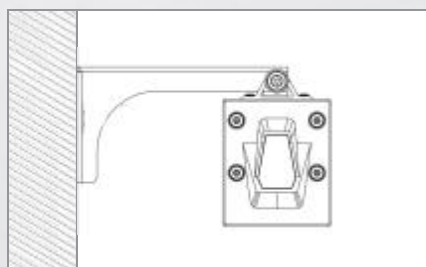

Side effect

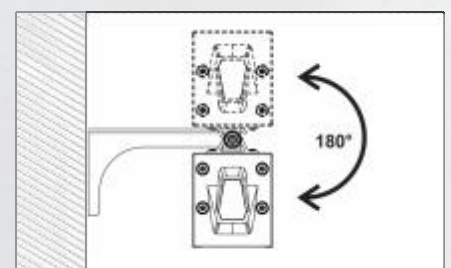


rotating 180 ° effect



# FL56 Product Range

Model No	FL56-018	FL56-036
Power Consumption(±5%)	18W	36W
Input Voltage	220-240VAC, 50 / 60 Hz	
Luminous Flux (±10%)	1800lm	3600lm
Product Dimension	508x121x79mm	998x121x79mm
Luminaire Net Weight(±0.3kg)	2.8kg	5.4kg
Export Carton Size	570x125x140mm	1065x125x140mm
Gross Weight(±0.3kg)	3.7kg	8.7kg
Efficacy(5000K Ra70)	100lm/W	
CCT & CRI	4000K (2200K,3000K, 5000K optional)/RGB/RGBW	
Beam Angle	F00111/F00113/F00114/F00115/F00116/F00117 (Single White) F00121/F00122/F00123/F00124 (RGBW)	
Operating Temperature	-20°C to +45°C	
Protection Rating	IP66, IK08	
Warranty	5 Years	

## Photometric Diagrams

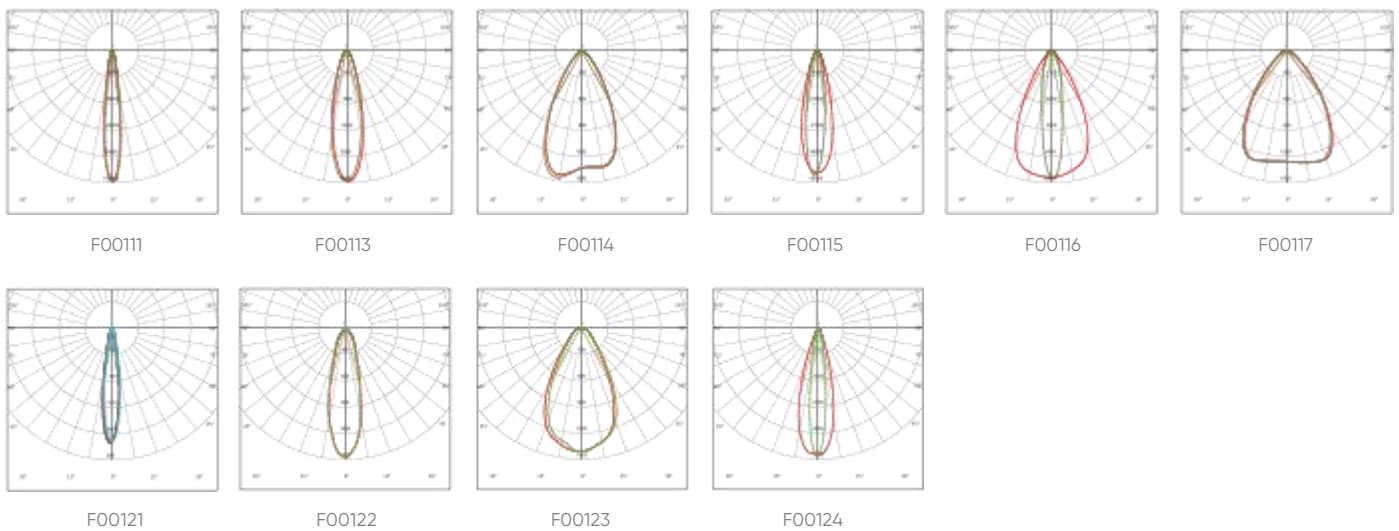

## Mounting Options



Adjustable bracket mounting



Ceiling mounting



Suspending mounting



All scenes