
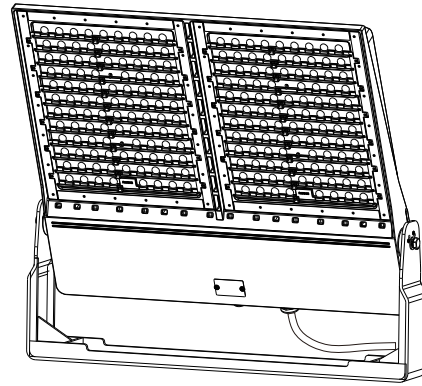



LED Area Light

Installation Instructions

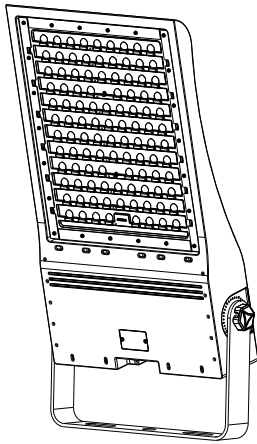


Physical Dimensions (Unit: mm/inch)

180W/240W/300W

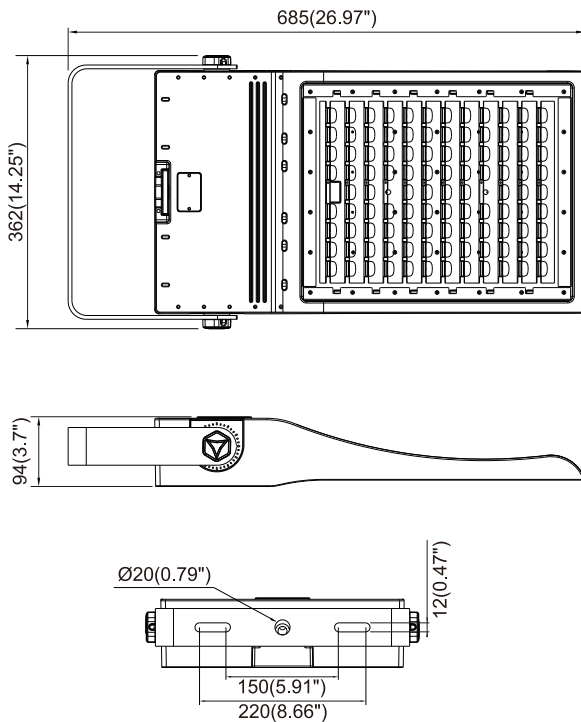

450W/600W

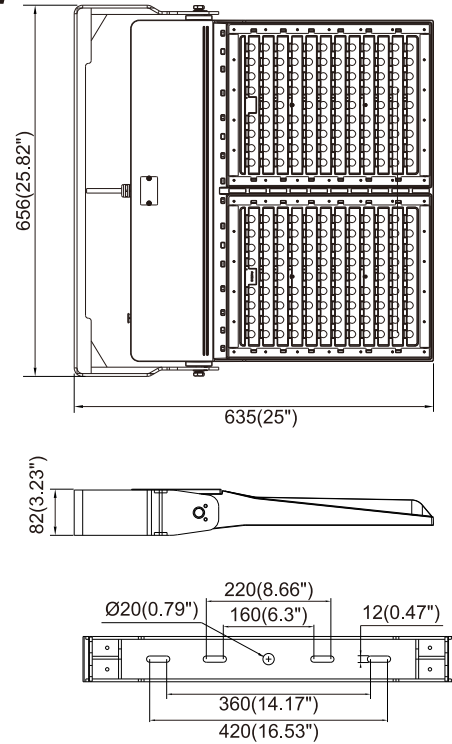


Product Specifications	180W	240W	300W	450W	600W
Input Voltage	100-277VAC / 120-277VAC / 100-240VAC / 220-240VAC (Subject to the input voltage on nameplate)				
Power Frequency	50/60 Hz				
Outlook Dimensions	685x362x94mm(26.97"x14.25"x3.7")			656x635x82mm(25.82"x25"x3.23")	
Luminaire Net Weight	9.3±0.3kg(20.50±0.66Lbs)		9.9±0.3kg(21.83±0.66Lbs)	15.7±0.3kg(34.61±0.66Lbs)	
Projected Area	0.22m ² (2.37ft ²)			0.33m ² (4.2ft ²)	
Storing Temperature	-30°C to +50°C(-22°F to +122°F)				
Working Temperature	-40°C to +70°C(-40°F to +158°F)				

LED Area Light


Installation Instructions

1. ✂


Recommended screw size: M10

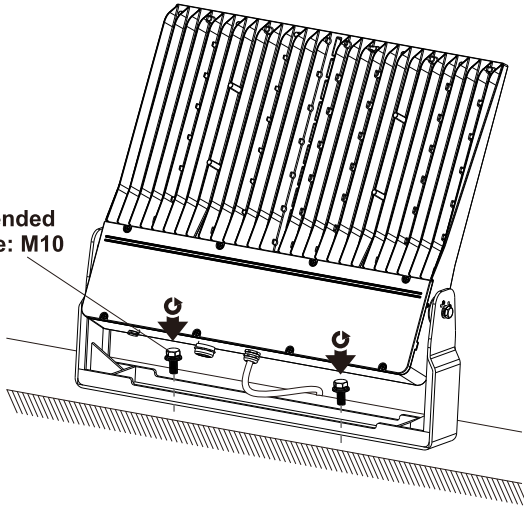


2. ✂

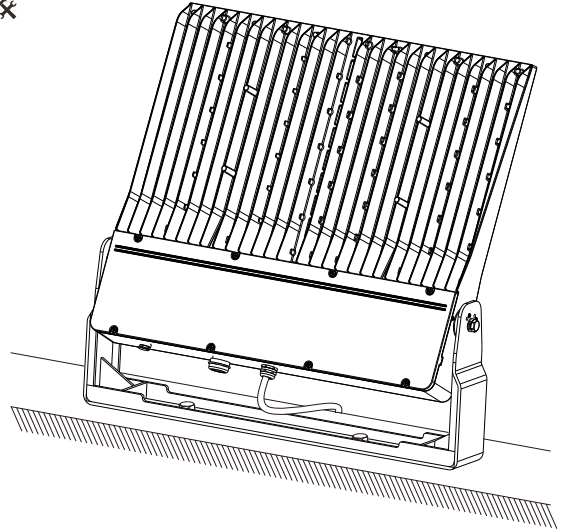

3. ✂

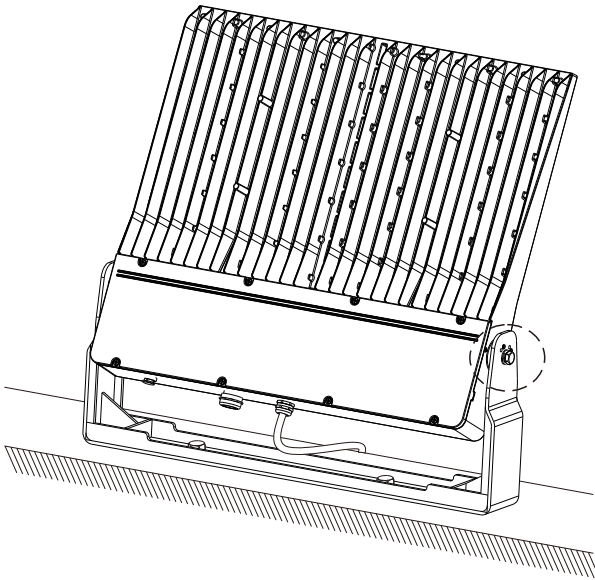

Rotatable angle

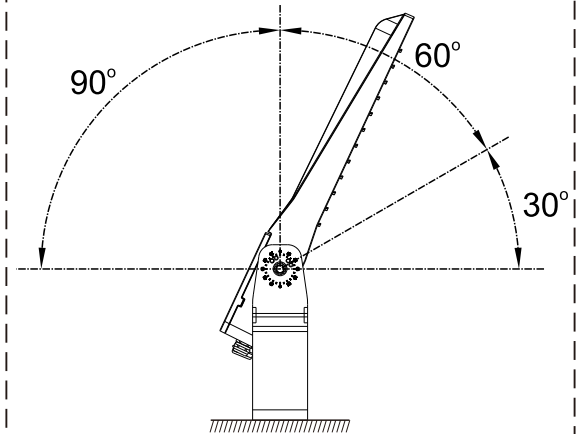

Dimmable

⊙	DIM+/DA1	purple	or	purple	or	blue	or	brown	or	black	or	red
	DIM-/DA2	gray		pink		white		blue		gray		orange
⊙	DIM+/DA1	purple		purple		purple		purple		purple		purple
	DIM-/DA2	gray	or	pink	or	gray	or	pink				
	Aux 12Vdc +	pink		black/white		black/white		red				
⊙	DIM+/DA1	purple		purple		purple		purple				
	DIM-/DA2	gray	or	pink	or	pink						
	Aux 12Vdc +	pink		black/white		black/white		red				
	Aux 12Vdc -	black/white		blue/white		orange						
⊙	L	brown		black		black		black				
	N	blue		white		white		white				
⊙	⊙GND	yellow/green	or	green	or	green		green				
	DIM+/DA1	black		red		brown						
	DIM-/DA2	gray		orange		blue						



Warning! do not wire dim cord to high voltage, or dim function will fail.

• The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

• For type Y attachments:

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.